

LINITOP®

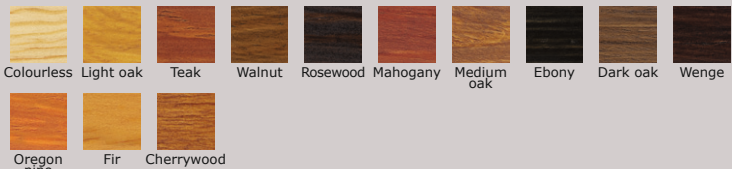
LINITOP PRIM & FINISH

Transparent impregnation woodstain



EXTERIOR

Priority to wood

Description	Transparent impregnation woodstain for outdoor wood of variable dimensions. Satin/matt appearance.
Classification	Family 1 - Class 4a (according to classifications NBT 22-003 and NBT 36-005).
Properties	<ul style="list-style-type: none"> • Three functions: <ol style="list-style-type: none"> 1 - Impregnation base to aid the adhesion of the topcoat (Linitop Classic** ou Solid**). 2 - Protective woodstain: application system in 3 coats. Ideal for wood subject to high humidity. 3 - Coloured base before finishing with Vernis**, Yacht Vernis** or Parquet**. • Contains a dry-film antifungal protective agent. • Deep penetration of the surface and protects it. Adapts perfectly to the dimensional variations of the wood. • Can be applied on site or in the workshop.
Basic uses	<ul style="list-style-type: none"> • Vertical surfaces. • Protects and decorates weatherboarding, chalets, fencing, railings. Except Red Cedar and wood types containing an anti-oxidant (e.g: Iroko...). • Can also be applied indoors: doors, door and window frames, panelling...
Characteristics <ul style="list-style-type: none"> • Composition: • Density (at +20°C): • Flash point: • Viscosity: • Solid content: • VOC: • Packaging: • Shelf life: • Storage conditions: • Appearance in the can: • Appearance of the dry product: • Colours: • Tools: • Dilution: • Cleaning of the tools: • Conditions of application: • Coverage: • Drying (data at +20°C and 50% relative humidity): • Safety: 	Alkyd resins. 0.915 ± 0.05. > 60°C. Fluid liquid. 33% ± 5. EU limit value for this product (cat A/f): 700 g/l (2010). This product contains a maximum of 485 g/l VOC. 1 l - 2.5 l - 5 l and 10 l. At least 2 years in the unused closed original packaging. Keep away from frost and high temperatures. Coloured liquid. Satin/matt.  Colourless Light oak Teak Walnut Rosewood Mahogany Medium oak Ebony Dark oak Wenge Oregon pine Fir Cherrywood Brush, roller, spray gun. Ready to use. White spirit. Respect the conditions and instructions stipulated by the product manufacturer. Do not apply at an ambient temperature of less than +10°C or greater than +30°C. Relative humidity: 50%. 14 to 18 m ² /l. - Dust-dry: 6 h. - Recoatable: 24 h. Refer to the safety data sheet and the text given on the packaging, in accordance with the applicable legislation.

The information set out consists of purely illustrative and are not the responsibility of the manufacturer, the application of products not made under his supervision.

Priority to wood

Surface preparation

- Use on wood whose usage, nature, quality, treatments and preparation comply with the applicable standards and DTU (DTU 59.1). The inspection and preparation of the surface are the responsibility of the user.
 - The wood must be dry, clean, in sound condition, free of millglaze and properly prepared (degrease, sand, dust off).
- On new wood:**
- Sand (grit 120) to encourage and optimise the opening of the pores.
- On old wood:**
- Make the surface bare by sanding or stripping.
- NB:** After sanding, always carefully clean the surface.

Recommendations before application

- Ready for use. Shake well before application.
 - Do not apply at an ambient air and wood temperature of less than +10°C and greater than +30°C. The relative humidity will be of the order of 50% for optimum drying.
 - Complies with the applicable standards and DTU.
 - Protect everything that does not have to be treated.
 - The moisture of the wood must not be greater than 15%.
- NB:** To protect the wood against UV, do not use «colourless» by itself outside as the finish coat. Always finish with 2 coloured coats.

Directions for use

- According to the condition of the surface:
- New wood:**
- After sanding, apply the protection according to one of the two systems proposed below.
- Greyed wood:**
- Clean with Wood Cleaner**, rinse and allow to dry.
 - Sand (grit 120) if necessary.
 - Apply the protection.
- Darkened, oiled wood:**
- Remove oil with Wood Oil Cleaner**, neutralise with Wood Cleaner**, rinse, allow to dry.
 - Sand (grit 120) if necessary.
 - Apply the protection.
- Wood to be stripped:** consult us.
- 1 - Impregnation undercoat system:**
- Apply a generous coat of Linitop Prim & Finish.
 - After fully drying, complete with two coats of coloured* Linitop Classic** or Solid** topcoat.
- 2 - Three coat protection system:**
- Apply three generous coats of Linitop Prim & Finish. The last two will be coloured and not colourless*.
- NB:** Pay particular attention to grooves and butts. When applying with a spray gun, smooth with a brush to avoid runs and aid the penetration of the product.

Advice of the professionals

- Always apply Linitop Prim & Finish in the direction of the wood fibres.
- On new wood, wood made bare, that is not durable and has not been treated with a preservative, it is recommended first treating it with an insecticide, fungicide and anti-blue stain agent. Consult us.
- Coloured base before finish:
 - Apply a coat of Linitop Prim & Finish*.
 - After drying and without sanding, complete with two coats of Vernis**, Yacht Vernis** or Parket**, sanding between the two coats.

Maintenance

- For the three coat protection system:
- Usual restoration:**
- Apply one or two coats depending on the condition after having brushed or sanded.
- Late restoration:**
- On a highly damaged surface, make the wood bare by sanding or stripping then apply three coats.
- NB:** After sanding, always carefully dust the surface.

* To protect the wood against UV, do not use «colourless» by itself outside as the finish coat. Always finish with 2 coloured coats. ** same manufacturer

For further help or advice please contact us on:
Belgium: +32 (0)10 420090 - 0800 95549
France: +33 (0)1 60 86 48 70
or consult our site: www.linitop.com

This notice cancels and replaces all previous notices on the same product. The advice provided, in particular on the maintenance, is only indicative and cannot substitute for an appropriate description of the nature and condition of the surface to be worked on. With technical developments continually occurring, it is for our customers to check, before application, with our services that this notice has not been replaced by a more recent edition.

LINITOP® is a trademark



Durieu S.A.
 91070 BONDOUFLE - France
 T. +33 (0)1 60 86 48 70
 F. +33 (0)1 60 86 84 84
 info@durieu.com
 www.durieu.com

Durieu Coatings S.A. / N.V.
 New Tech Center
 Avenue Albert Einstein 2 A
 1348 Louvain-La-Neuve
 Belgique / België
 T. +32 (0)10 420 090
 F. +32 (0)10 420 099
 info@durieucoatings.com
 www.durieucoatings.com

0800 95 549